


## FDF WALL MOUNTS

---

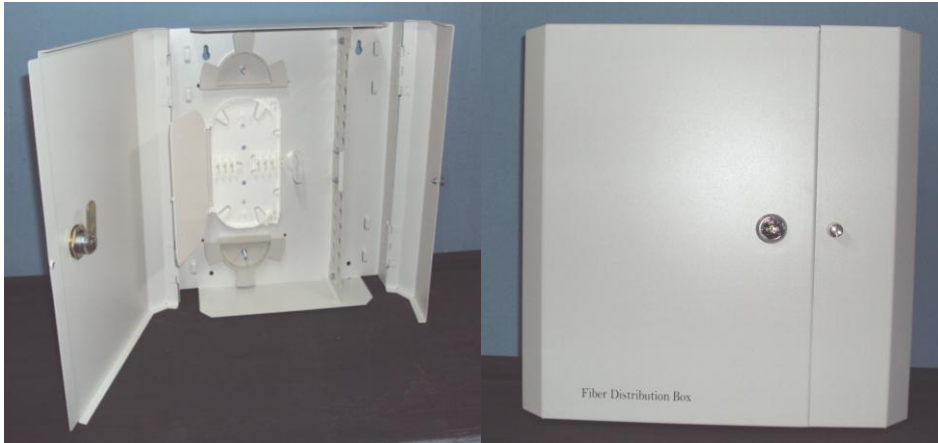

### Description

Wall-Mount Fiber distribution box provides a Convenient interconnects point between incoming OSP cables and customer premises cabling. The wall mount is designed under indoor condition. There are two section , one for splicing area composed splice tray and bending control devices. The other side are patching area.

### Features / Benefits

- Provides easy access for connector FC ,SC ,LC, E2000 panel
- Lockable dual doors with optional lock kits and available
- Includes routing guides for fiber management

Material : steel 1.2mm

Size: MM.

12 - 24 PORT	=	85 (D) x 315 (H) x 310 (W)
48 - 60 PORT	=	125 (D) x 380 (H) x 410 (W)
120 PORT	=	150 (D) x 450 (H) x 410 (W)

## FDF WALL MOUNTS

### SPLICE PROTECTIVE SLEEVE



Splice sleeve for fiber-optic fusion splices can be used to rebuild the primary coating for fiber to provide protection at the fusion joint area.

Structure : Shrinkable sleeve  
Stainless steel rod



#### Generis Specifications :

Description	Typical diameter after heating $\Phi$ (mm)	Fusion Tube $\Phi$ (mm)	Length of the stainless steel rod l(mm)	Length of Sleeve l(mm)
45 mm	2.5	1.3	40	45
60 mm	2.5	1.3	55	60

Change of temperature	Temperature Cycle  Cycles 1 cycle		- 40°C to +85°C  10 cycles 6 hr.
-----------------------	--	--	---