


FTTx Inline Closure

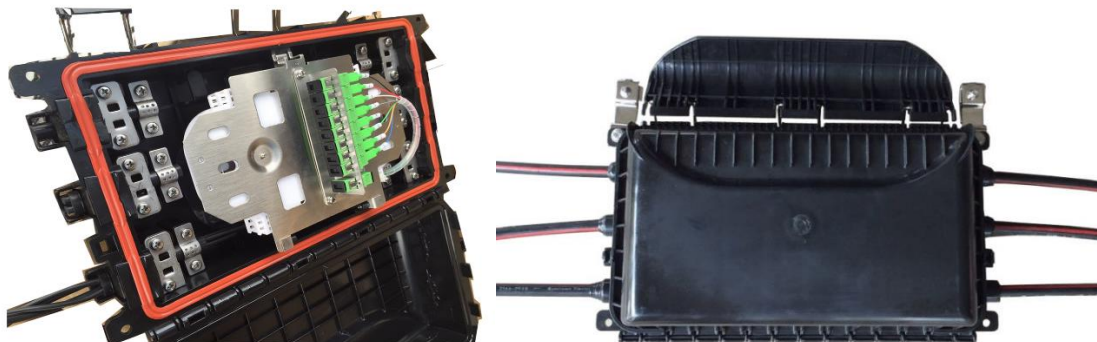

Optical Fiber inline Closure Model FOC-CB12-60SJ. Available with optical fiber cable enclosure for fiber splice, splitter in outside plant network for FTTx and broadband applications., water protection proof, Designed for quick installation and easy to use, Thus saving time in the workplace. The closure has 6 cable entry ports. The entries can be 1 : 2, 1 : 4, 1 : 8 and 1 : 16 Splitter.

Features

- Made from Material Acrylonitrile Butadiene Styrene (ABS), Resistant sunlight (UV) and climatic conditions of the acid and alkali, vibration resistant, Durable pull and bend of cable it well.
- Easy to install (Clamp Lock)
- Can be open and close lid easily without special tools.
- Design a clamp attached on the lid, for easy to use, dropped during operation.
- Prepare successful accessories, easily installed and reduce the time of installation.

- Can be install cable freely and easily with a clamp lock optical fiber cable in order to keep tidy.
- Provide hanging clamp Stainless SUB 304 and disconnect from cable stand, convenient fast install and can be use aerial and air-mounted on pole.
- Designed front cover with space for company name or sprayed or painted stripes Logo is permanently attached to the plastic.
- Splice Tray and lid made from Polycarbonate or white ABS.
- Protective Sleeve length 60 mm and core made of Stainless Steel.
- Size: 375 x 180 x 120 cm
- Weight 2 kg with 6 holes for cable in-out.
- IP 65 , 68
- Brand of Chamber, Products made in Thailand.